



**VPO**  
Visual Persistence Oscilloscope

## GDS-2000A Series

### FEATURES

- 300/200/100/70MHz Bandwidth, 2 or 4 Input Channels
- 2GSa/s Real-Time Sampling Rate and 100GSa/s Equivalent Time Sampling Rate
- 2Mpoints Record length
- VPO Technology to Display Less-Frequently-Occurred Signals
- Fastest Update Rate of 80,000 Waveform Per Second
- Segmented Memory Acquisition and Waveform Search Function
- Optional 8 or 16 Additional Digital Channels with Logic Analyzer (MSO) & Serial Bus I<sup>2</sup>C/SPI/UART Trigger and Decode Software
- Optional Function Generator
- Flexible Remote Control Connectivity (Standard : USB ; Optional : LAN/ GPIB)


The GDS-2000A Series DSO comes along with a high-value design framework, including 2G Sa/s sampling rate, 2M points record length, 2 or 4 input channels and a large screen color LCD display, to perform very fast waveform acquisition and procession at 80,000 wfms/s update rate utilizing VPO (Visual Persistence Oscilloscope) technology.

The GDS-2000A Series, carrying bandwidths of 300MHz, 200MHz, 100MHz and 70MHz and inputs of 2 and 4 channels, makes up a family of 8 in the whole series. The 2M points record length not only enables the long time waveform storage but also plays the role as a huge database of the input signals for the post-storage waveform analysis. Two powerful functions, Waveform search and segmented memory are available of the GDS-2000A Series to facilitate the search for the waveforms of interest from the long record length. Waveform search defines the waveform types for the search whereas segmented memory divides the whole record length into a number of segments as to speed up the waveform search by looking into only the segments containing the waveforms of interest.

The ping-pong waveform acquisition design and the advanced VPO-technology-based waveform procession system, greatly enhance the speed and the quality of waveform display of GDS-2000A Series at a very fast update rate of 80,000 waveforms per second.

The optional logic analyzer function allows the signal acquisition through logic triggering and enables the logic waveforms and the analog waveforms to be shown on the same screen for comparison and time correlation analysis. This Mixed Signal Oscilloscope (MSO) function is field-installable with a plug-in module, containing either 8 or 16 input channels, at the rear panel. The MSO function supports the I<sup>2</sup>C / SPI / UART serial bus trigger and decoding.

The GDS-2000A Series is equipped with all the features that a high-tech DSO should have today. The RS-232C interface, USB ports, and Go-NoGo output are provided as standard, and the Ethernet port, SVGA Video output and GPIB port are available as options for user's free selection. At a moderate cost, GDS-2000A Series is a DSO to provide high customer-value with innovative design.

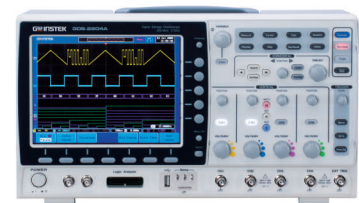

Front



Rear Panel

### APPLICATIONS

- Industrial and Educational R&D Labs
- Product Testing and Quality Assurance
- Embedded System and Mix Signal Design
- System Integration & Debugging
- Maintenance & Repair Service

## SPECIFICATIONS

		GDS-2072A	GDS-2074A	GDS-2102A	GDS-2104A	GDS-2202A	GDS-2204A	GDS-2302A	GDS-2304A
<b>VERTICAL</b>	<b>Channels</b>	2Ch+EXT	4Ch+EXT	2Ch+EXT	4Ch+EXT	2Ch+EXT	4Ch+EXT	2Ch+EXT	4Ch+EXT
	<b>Bandwidth</b> <b>Rise Time</b> <b>Bandwidth Limit</b>	DC~70MHz(-3dB) 5ns 20MHz		DC~100MHz(-3dB) 3.5ns 20MHz		DC~200MHz(-3dB) 1.75ns 20M/100MHz		DC~300MHz(-3dB) 1.17ns 20M/100M/200MHz	
	<b>Vertical Resolution</b> <b>Input Coupling</b> <b>Input Impedance</b> <b>DC Gain Accuracy(**)</b>	8 bits@1M : 1mV~-10V (* : When the vertical scale is set to 1mV/div, the bandwidth limit will be set to 20MHz automatically) AC, DC, GND 1MΩ // 16pF approx. ±(5% X  Readout  + 0.1div + 1mV) when 1mV/div is selected ; ±(3% X  Readout  + 0.1div + 1mV) when 2mV/div or greater is selected (* : The measurement type is average of ≥16 waveforms with vertical position at zero)							
	<b>Polarity</b> <b>Maximum Input Voltage</b> <b>Offset Position Range</b> <b>Waveform Signal Process</b>	Normal , Invert 300V (DC+AC Peak), CAT I 1mV/div ~ 20mV/div : ±0.5V ; 50mV/div ~ 200mV/div : ±5V ; 500mV/div ~ 2V/div : ±25V ; 5V/div~10V/div : ±250V +, -, x, ÷, FFT, FFTms FFT : Spectral magnitude. Set FFT Vertical Scale to Linear RMS or dBV RMS, and FFT Window to Rectangular, Hamming, Hanning, or Blackman-Harris							
<b>TRIGGER</b>	<b>Source</b> <b>Trigger Mode</b> <b>Trigger Type</b>	Ch1 ,CH2, CH3*, CH4* ; Line, EXT, D0-D15 ; *four channel models only Auto (Supports Roll Mode for 100 ms/div and slower), Normal, Single Edge, Pulse Width, Video, Pulse Runt, Rise & Fall, Alternate, Event-Delay(1~65,535 events), Time-Delay(10ns~10s), Logic*, Bus* , *with DS2-LAD option							
	<b>Trigger Holdoff Range</b> <b>Coupling</b> <b>Sensitivity</b> <b>Coupling</b> <b>Sensitivity</b>	10ns ~ 10s AC, DC, LF rej. , Hf rej. , Noise rej. DC ~ 100MHz Approx. 1div or 1.0mV ; 100MHz ~ 200MHz Approx.1.5div or 15mV ; 200MHz ~ 300MHz Approx.2div or 20mV AC,DC,LF rej. ,Hf rej. ,Noise rej. DC ~ 100MHz Approx. 1div or 1.0mV ; 100MHz ~ 200MHz Approx. 1.5div or 15mV ; 200MHz ~ 300MHz Approx. 2div or 20mV							
<b>EXT TRIGGER</b>	<b>Range</b> <b>Sensitivity</b>	±15V DC ~ 100MHz Approx. 100mV 100MHz ~ 200MHz Approx. 150mV ; 200MHz ~ 300MHz Approx. 150mV 1MΩ ±3%, -16pF							
<b>HORIZONTAL</b>	<b>Time Base Range</b> <b>Pre-trigger</b> <b>Post-trigger</b> <b>Accuracy</b>	1ns/div ~ 100s/div (1-2-5 increments); ROLL : 100ms/div ~ 100s/div 10 div maximum 1,000 div max ( depend on time base ) ±20 ppm over any ≥ 1 ms time interval							
	<b>Real Time Sample Rate</b> <b>ET Sample Rate</b> <b>Record Length</b> <b>Acquisition Mode</b> <b>Peak Detection</b> <b>Average</b>	Max. : 2GSa/s 100GSa/s maximum for all models Max. : 2Mpts Normal, Average, Peak Detect, Single 2ns (typical) Selectable from 2 to 256							
<b>X-Y MODE</b>	<b>X-Axis Input</b> <b>Y-Axis Input</b> <b>Phase Shift</b>	Channel 1 ; Channel 3* (* : four channel models only ) Channel 2 ; Channel 4* (* : four channel models only ) ±3° at 100kHz							
<b>CURSORS AND MEASUREMENT</b>	<b>Cursors</b> <b>Automatic Measurement</b>	Amplitude, Time, Gating Available; Unit : Seconds(S), Hz(1/S), Phase (Degrees), Ratio(%) 36 sets: Pk-Pk, Max, Min, Amplitude, High, Low, Mean, Cycle Mean, RMS, Cycle RMS, Area, Cycle Area, ROVShoot, RPREShoot, FPREShoot, Frequency, Period, RiseTime, FallTime, +Width, -Width, Duty Cycle, +Pulses, -Pulses, +Edges, -Edges, FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF, Phase							
	<b>Control Panel Function</b> <b>Auto Counter</b> <b>Autoset</b> <b>Save Setup</b> <b>Save Waveform</b>	Cursors measurement 6 digits, range from 2Hz minimum to the rated bandwidth Single-button, automatic setup of all channels for vertical, horizontal and trigger systems, with undo Autoset 20set 24set							
<b>DISPLAY SYSTEM</b>	<b>TFT LCD Type</b> <b>Display Resolution</b> <b>Interpolation</b> <b>Waveform Display</b> <b>Waveform Update Rate</b> <b>Display Graticule</b>	8" TFT LCD SVGA color display(LED Back-light) 800 horizontal x 600 vertical pixels (SVGA) Sin(x)/x & Equivalent time sampling Dots, Vectors, Variable persistence(16ms~10s), Infinite persistence 80,000 waveforms per second, maximum 8 x 10 divisions							
<b>INTERFACE</b>	<b>RS-232C</b> <b>USB Port</b> <b>Ethernet Port</b> <b>SVGA Video Port</b> <b>GPIO</b> <b>Go/NoGo BNC</b> <b>Kensington Style Lock</b>	DB-9 male connector 2 sets USB 2.0 high-speed host port ;1 set USB high-speed 2.0 device port RJ-45 connector, 10/100Mbps with HP Auto-MDIX (option) SVGA output (option) GPIO module (Optional) 5V Max/10mA TTL open collector output Rear-panel security slot connects to standard Kensington-style lock							
<b>LOGIC ANALYZER (OPTION)</b>	<b>Sample Rate</b> <b>Bandwidth</b> <b>Record Length</b> <b>Input Channels</b> <b>Trigger Type</b> <b>Thresholds</b> <b>Threshold Selections</b> <b>User-defined Threshold Range</b> <b>Maximum Input Voltage</b> <b>Minimum Voltage Swing</b> <b>Vertical Resolution</b>	500MSa/s 200MHz 2M max 16 Digital (D15 - D0) or 8 Digital (D7~D0) Edge, Pattern, Pulse Width, Serial bus (I <sup>2</sup> C, SPI, UART) Quad-D0 ~ D3, D4 ~ D7. . . Thresholds TTL, CMOS, ECL, PECL, User Defined ±10V ±40V ±500mV 1 bit							
<b>POWER SOURCE MISCELLANEOUS</b>	<b>Line Voltage Range</b> <b>Multi-Language Menu</b> <b>On-Line Help</b> <b>Time clock</b>	AC 100V ~ 240V, 48Hz ~ 63Hz, auto selection Available Available Time and date, provide the date/time for saved data							
<b>DIMENSIONS &amp; WEIGHT</b>	380(W) X 220(H) X 145(D)mm, Approx. 4.2 kg								

Note : Three-year warranty, excluding probes & LCD display panel.

Specifications subject to change without notice.

DS-2000AGD1DH

### ORDERING INFORMATION

<b>GDS-2304A</b>	300MHz, 4-Channel, Visual Persistence DSO
<b>GDS-2302A</b>	300MHz, 2-Channel, Visual Persistence DSO
<b>GDS-2204A</b>	200MHz, 4-Channel, Visual Persistence DSO
<b>GDS-2202A</b>	200MHz, 2-Channel, Visual Persistence DSO
<b>GDS-2104A</b>	100MHz, 4-Channel, Visual Persistence DSO
<b>GDS-2102A</b>	100MHz, 2-Channel, Visual Persistence DSO
<b>GDS-2074A</b>	70MHz, 4-Channel, Visual Persistence DSO
<b>GDS-2072A</b>	70MHz, 2-Channel, Visual Persistence DSO

### ACCESSORIES

User manual x 1 ,Power cord x 1, CD x 1
GTP-070A-4 :70MHz (10:1/1:1) Switchable passive probe for GDS-2072A/2074A(one per channel)
GTP-150A-2 :150MHz (10:1/1:1) Switchable passive probe for GDS-2102A/2104A(one per channel)
GTP-250A-2 :250MHz (10:1/1:1) Switchable passive probe for GDS-2202A/2204A(one per channel)
GTP-350A-2 :350MHz (10:1/1:1) Switchable passive probe for GDS-2302A/2304A(one per channel)

### OPTION

<b>DS2-LAN</b>	Ethernet & SVGA output
<b>DS2-GPIB</b>	GPIB Interface
<b>DS2-FGN</b>	DDS Function Generator
<b>DS2-8LA</b>	8-Channel Logic Analyzer : includes 8-Channel Logic Analyzer Card(GLA-08)and 8-Channel Logic Analyzer Probe (GTL-08LA)
<b>DS2-16LA</b>	16-Channel Logic Analyzer includes 16 Channel Logic Analyzer Card(GLA-16) and 16-Channel Logic Analyzer Probe (GTL-16LA)

### OPTION ACCESSORIES

<b>GTL-08LA</b>	8-Channel Logic Analyzer Testing Probe
<b>GTL-16LA</b>	16-Channel Logic Analyzer Testing Probe
<b>GLA-08</b>	8-Channel Logic Analyzer Card
<b>GLA-16</b>	16-Channel Logic Analyzer Card

### FREE DOWNLOAD

<b>PC Software</b>	FreeWave software	<b>Driver</b>	USB driver ; LabView driver
--------------------	-------------------	---------------	-----------------------------

Global Headquarters

**GOOD WILL INSTRUMENT CO., LTD.**

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

China Subsidiary

**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**

NO. 69, Lushan Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277  
E-mail: marketing@instek.com.cn

Malaysia Subsidiary

**GOOD WILL INSTRUMENT (M) SDN. BHD.**

27, Persiaran Mahsuri 1/1, Sunway Tunas,  
11900 Bayan Lepas, Penang, Malaysia  
T +604-6309988 F +604-6309989  
E-mail: sales@goodwill.com.my

U.S.A. Subsidiary

**INSTEK AMERICA CORP.**

3661 Walnut Avenue Chino, CA 91710, U.S.A.  
T +1-909-5918358 F +1-909-5912280  
E-mail: sales@instekamerica.com

Japan Subsidiary

**INSTEK JAPAN CORPORATION**

4F, Prosper Bldg, 1-3-3 Iwamoto-Cho Chiyoda-Ku,  
Tokyo 101-0032 Japan  
T +81-3-5823-5656 F +81-3-5823-5655  
E-mail: info@instek.co.jp

Korea Subsidiary

**GOOD WILL INSTRUMENT KOREA CO., LTD.**

Room No.805, Ace Hightech-City B/D 1Dong,  
Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea  
T +82-2-3439-2205 F +82-2-3439-2207  
E-mail: gwinstek@gwinstek.co.kr

**GW INSTEK**

Simply Reliable

[www.gwinstek.com](http://www.gwinstek.com)